



Hospitality Lamp Manufacturer



QUALITY SERVICE INNOVATION

HK ZEROUNO LAMP CO., LTD.

5th Floor, Yongxinshangchen,
Yongxin Industrial Park,
Henglan town,
Zhongshan city,
Guangdong province, China.
Postal code: 528478

Mob: +86 150-1944-2144
Tel: +86 0760-2259-2016
Skype: sonnyiu
Wechat: sonnyiu
www.zerouno-lighting.com
E-mail: sonny@zerouno-lighting.com



COMPANY PROFILE

HK ZeroUNO Lamp Co., Ltd. is a group company that is cooperated with New Zealand ZeroUNO LTD to provide sales service and manufacturing in China. The New Zealand head office has a professional hotel design team with a minimalist design style. The hotel's lighting projects include Hilton, Sofitel, IHG, Sheraton, Accor, Hyatt and other internationally renowned hotel guestroom projects. The sharp demanding quality and service requirements have created the factory's quality level and excellent service awareness; Shenzhen company provides comprehensive sales and after-sales service; Zhongshan company is the lighting manufacturing base.

With Zhongshan's very mature lighting manufacturing industry supply chain, ZeroUNO specializes in the design, research and development and manufacture of hotel bespoke lamps. It provides professional customized hotel guestroom lighting. The company's concept is "quality first, timeliness supreme, service good". Advocating simple design style, reliable structure, paying attention to product details, strictly controlling and guaranteeing the quality of lighting products, HK ZeroUNO Lamp Co., Ltd. is forming a good reputation in the industry and establishing a well-known brand image.

Our vision - to become a world-class supplier of lighting products

Our core values - focus on detail, pay attention to timeliness, help customers solve lighting problems



RECESSED SERIES ----- 01-06

SURFACED SERIES ----- 07-08

BACKLIGHT SERIES ----- 09-10

SOFT WAND SERIES ----- 11-13

MOTHER&CHILD SERIES ----- 14-16



The processing technology




Production Equipment





Code : UNO-BH-001
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Dock switch under head
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

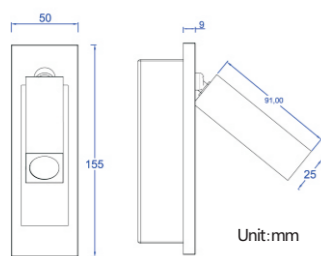


Cutout size: L130 x W40 x H42mm

CE IP20



Code : UNO-BH-011
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
 Touch sensor switch is available
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

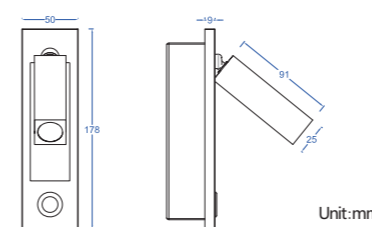


Cutout size: L160 x W40 x H60mm

CE IP20



Code : UNO-BH-006
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Dock switch under head
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

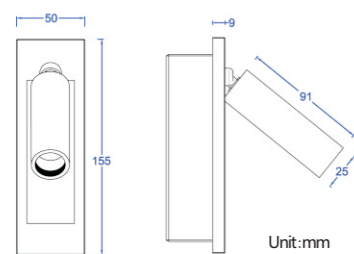


Cutout size: L130 x W40 x H42mm

CE IP20




Code : UNO-BH-016
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
 Touch sensor switch is available
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



Cutout size: L160 x W40 x H60mm


CE IP20



Unit:mm

Cutout size: L160 x W40 x H60mm


Code : UNO-BH-017
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
 Touch sensor switch is available
USB Outlet : 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



Unit:mm

Cutout size: L155 x W55 x H40mm

Code : UNO-BH-035
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Toggle switch on plate
USB Outlet : 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

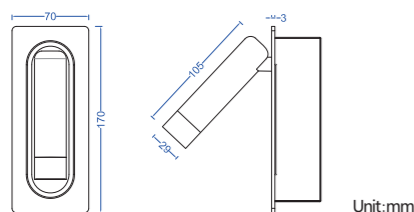


Unit:mm

Cutout size: L150 x W55 x H45mm



Switch

Code : UNO-BH-041
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Dock switch under head
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

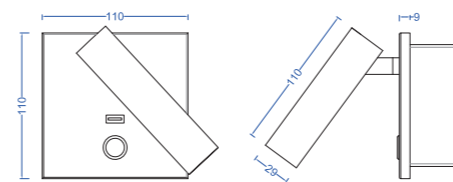

Unit:mm

Cutout size: L95 x W60 x H45mm




USB interface

Code : UNO-BH-029
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Recessed into wall/headboard
Switch : Metal push switch on plate
USB Outlet : 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.






Code: UNO-BH-029
Input: AC100~240V
LED: CREE XPE 1~3W
CCT: 2700K/3000K/4000K
Beam Angle: 30° or customized
Lumen: 120lm
Driver: UL/SAA/TUV/CE listed
Plug: Hard wired or custom wall plug
Installation: Recessed into wall/headboard
Switch: Toggle switch on plate
Finish: Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

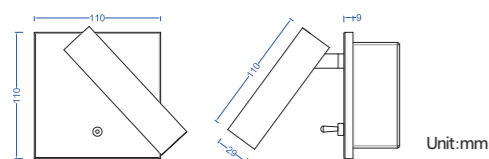

Cutout size: L95 x W55 x H45mm


CE

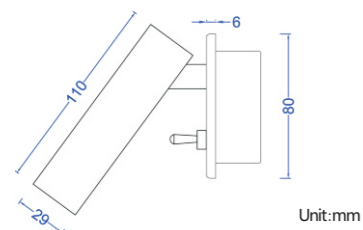

Cutout size: D50 x H50mm

Code: UNO-BH-030
Input: AC100~240V
LED: CREE XPE 1~3W
CCT: 2700K/3000K/4000K
Beam Angle: 30° or customized
Lumen: 120lm
Driver: UL/SAA/TUV/CE listed
Plug: Hard wired or custom wall plug
Installation: Recessed into wall/headboard
Switch: Toggle switch on plate
Finish: Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE

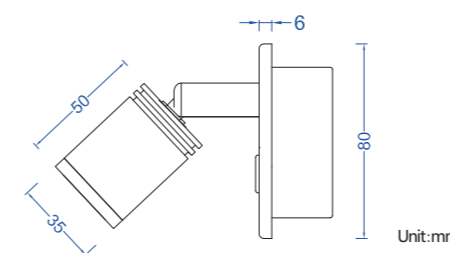


Cutout size: D50 x H50mm

Code: UNO-BH-059
Input: AC100~240V
LED: CREE XPE 1~3W
CCT: 2700K/3000K/4000K
Beam Angle: 30° or customized
Lumen: 120lm
Driver: UL/SAA/TUV/CE listed
Plug: Hard wired or custom wall plug
Installation: Recessed into wall/headboard
Switch: Metal push switch on plate
Finish: Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

CE

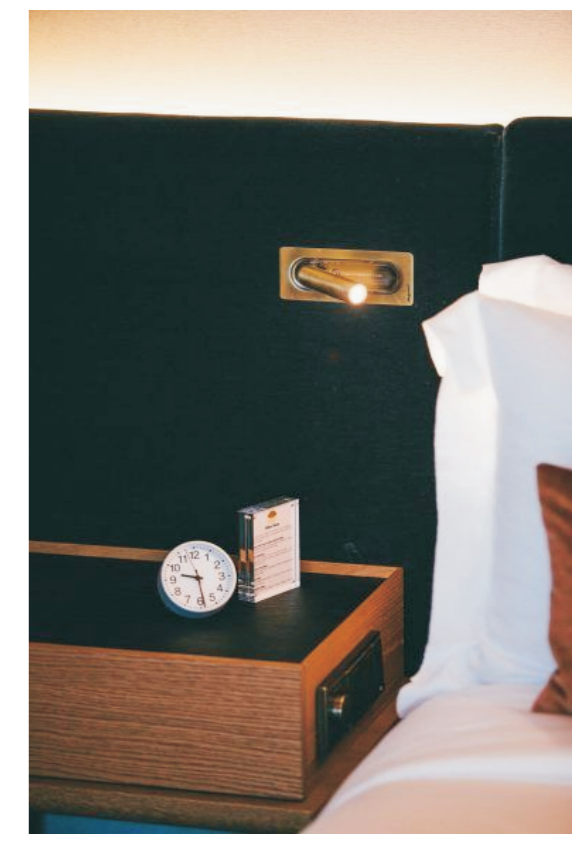




Unit:mm

Code : UNO-BH-021
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Slim rocker switch on plate
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE IP20



Unit:mm

Code : UNO-BH-027
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Slim rocker switch on plate
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.

CE IP20

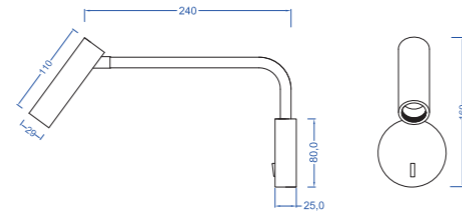

Unit:mm

Code : UNO-BH-063
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Slim rocker switch on plate
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.


CE IP20



LEFT




RIGHT

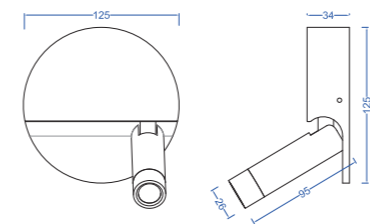



Unit:mm

Code : UNO-BH-036
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Dock switch
Finish : Matt black, matt white, chrome, satin nickel
 matt nickel, brushed brass, black bronze etc.



CE IP20

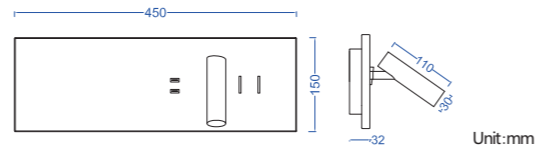

Code : UNO-BH-064
Input : AC100~240V
LED : CREE XPE 1~3W / 6W SMD back mood
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120 lm for reading light
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Slim rocker switch on plate
USB Outlet : Twin 5V 2.1A fast charger
Finish : Matt black, matt white, chrome, wood grain, satin nickel, matt nickel, brushed brass, etc.

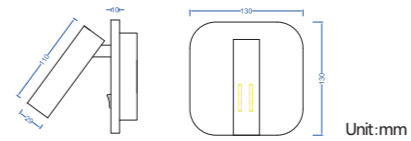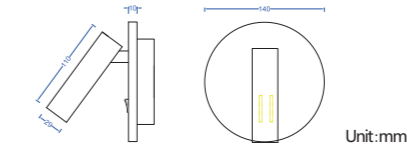


Code : UNO-BH-066/067
Input : AC100~240V
LED : CREE XPE 1~3W / 6W SMD back mood
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120 lm for reading light
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Round rocker switch on plate
Finish : Matt black, matt white, chrome, wood grain, satin nickel, matt nickel, brushed brass, etc.

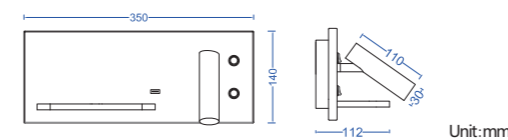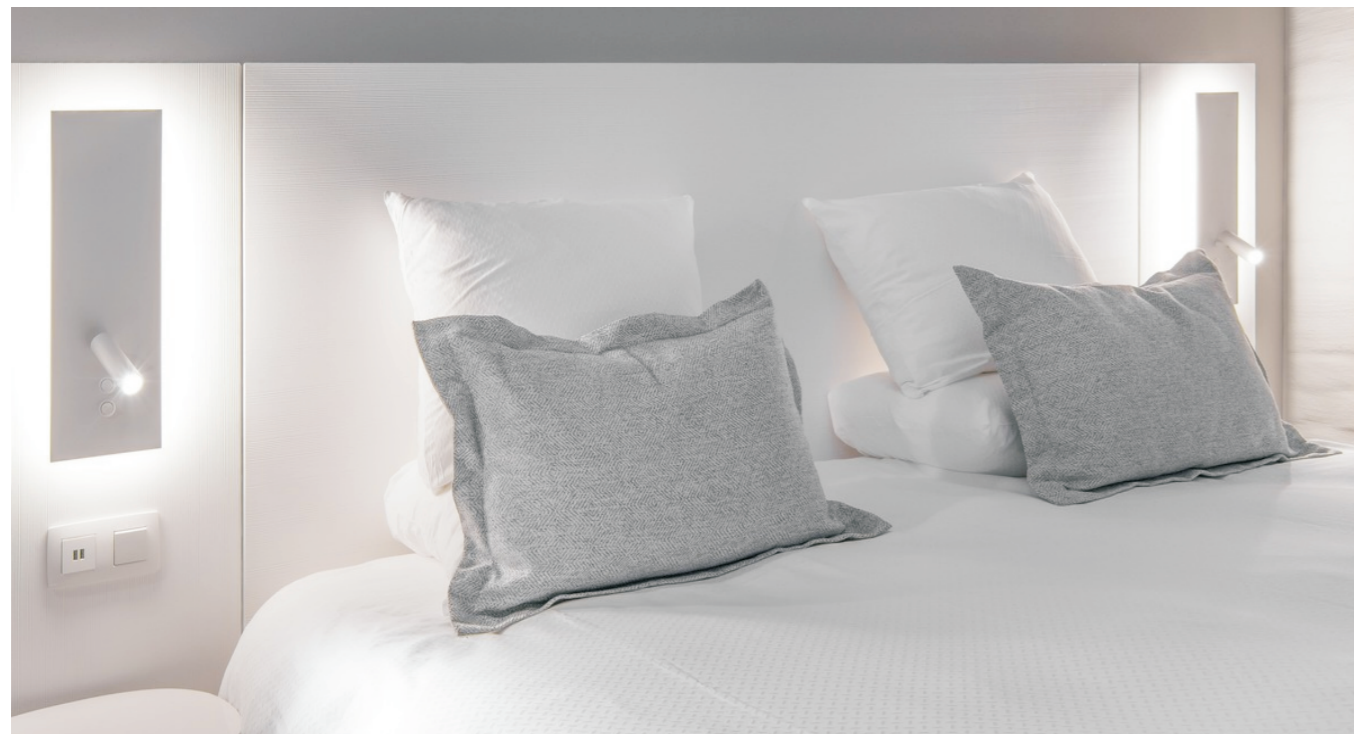


Code : UNO-BH-065
Input : AC100~240V
LED : CREE XPE 1~3W / 6W SMD back mood
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120 lm for reading light
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired or custom wall plug
Installation : Surface mounted
Switch : Round rocker switch on plate
USB Outlet : Twin 5V 2.1A fast charger
Shelf : 5V 1A Wireless charger
Finish : Matt black, matt white, chrome, wood grain, satin nickel, matt nickel, brushed brass, etc.




 Unit:mm
 Cutout size: L100 x 30 x 30mm


Code : UNO-BH-058
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Toggle switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, brushed brass, black bronze etc.

IP20


 Unit:mm
 Cutout size: D40 x H50mm

Code : UNO-BH-054
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Recessed
Switch : No switch
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.

IP20



Unit:mm


Code : UNO-BH-057
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Slim rocker switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, brushed brass, black bronze etc.

IP20


 Unit:mm
 Cutout size: D50 x H50mm

Code : UNO-BH-055
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Recessed
Switch : Metal push switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.


IP20



Unit:mm

Code : UNO-BH-049
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Slim rocker switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, brushed brass, black bronze etc.


IP20



Unit:mm


Code : UNO-BH-056
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Toggle switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.

IP20




Cutout size: D40 x H50mm

Code : UNO-BH-050
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Recessed
Switch : No switch
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.

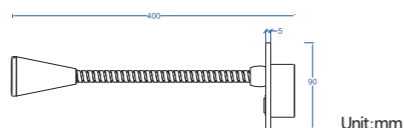


Cutout size: D50 x H50mm

Code : UNO-BH-051
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Recessed
Switch : Metal push switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.




Unit:mm

Code : UNO-BH-052
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Toggle switch on plate
Finish : Matt black, matt white, chrome, satin nickel, matt nickel, etc.



Unit:mm

Code : UNO-BH-046
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Single rocker switch for Reading
Finish : Chrome, satin nickel, black chrome, etc.



Unit:mm


Code : UNO-BH-047
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30°or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Twin rocker switch
Finish : Chrome, satin nickel, black chrome, etc.






UNO-BH-061


Code : UNO-BH-061/062
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Finish : Chrome, satin nickel, black chrome, etc.

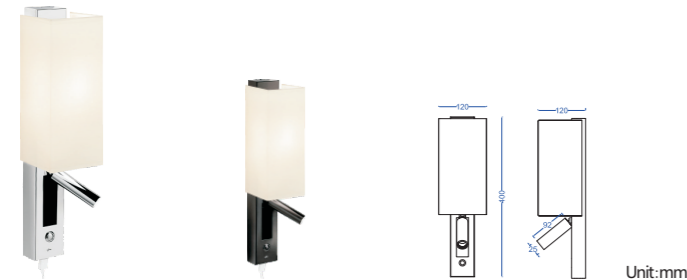

UNO-BH-062

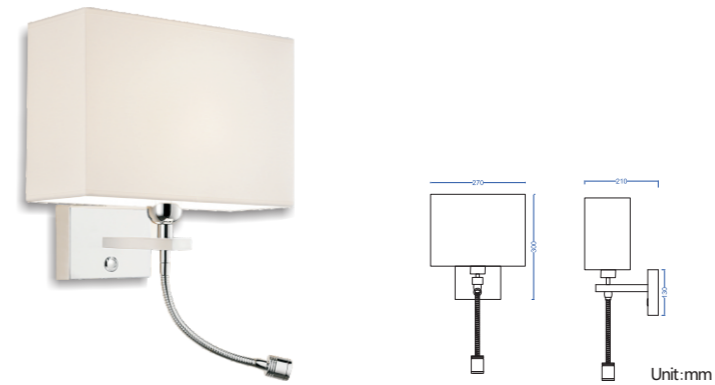

UNO-BH-042

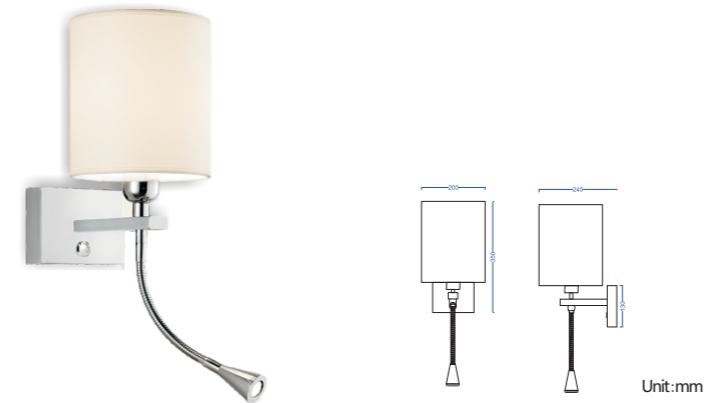

UNO-BH-043

Code : UNO-BH-042/043
Input : AC100~240V
LED : CREE XPE 1~3W
CCT : 2700K/3000K/4000K
Beam Angle : 30° or customized
Lumen : 120lm
Mood Light : 1x E27 lamp max 40W
Shade : Fabric TBA
Driver : UL/SAA/TUV/CE listed
Plug : Hard wired
Installation : Surface mounted
Switch : Single metal push switch on plate
Finish : Chrome, satin nickel, black chrome, etc.



INSTALLATION INSTRUCTION

1. The installation of all electrical products should be undertaken with utmost care and qualified electrician should carry out the work to ensure compliance with any local wiring regulations.
2. Always ensure that the mains electrical supply is disconnected before installing the light.
3. Check the routing of electrical supply cable to avoid cutting it or damaging it during installation.
4. Make all electrical connections in accordance with the instructions attached to the light, ensure all connections are not loose with wire parts properly covered.
5. Ensure the light source is compatible with local voltage and follow any maximum wattage instructions shown on the light.
6. If you have any questions regarding the installation of ZEROUNO lights, please contact ZEROUNO for assistance.