


HY-1560N/TBL

拉链窗一次成型专用缝纫机
Zipper Special-made sewing machine



产品视频
For video please
scan here

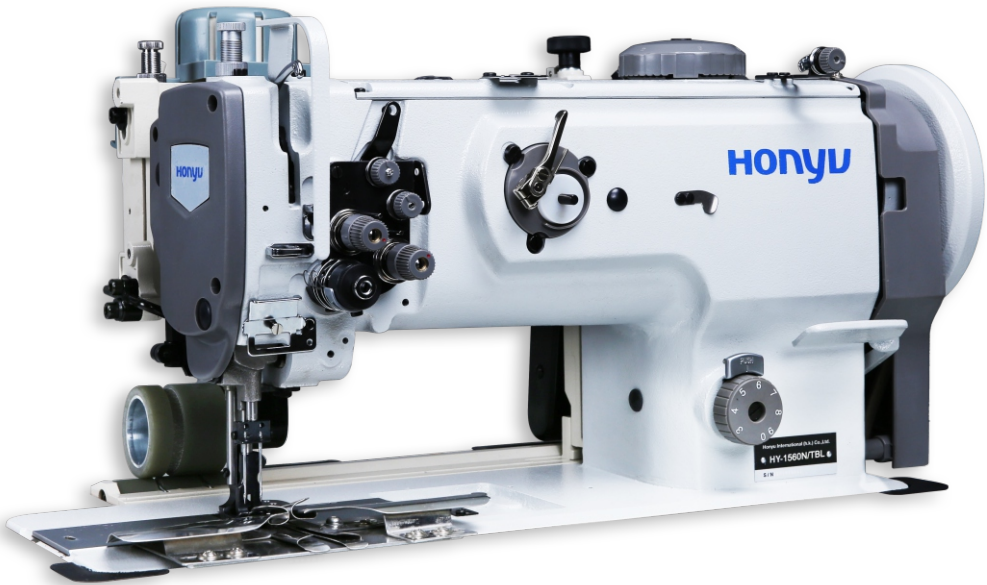

技术参数 / Specification

型号 Model No.	HY-1560N/TBL
送料方式 Feeding system	交替压脚、送布牙和机针综合送料 Alternating presser foot, feed dog and needle feeding
最高缝速 Max sewing speed	2000 针/分钟 2000 s.p.m.
线芯直径 Shuttle diameter	Φ28mm
适用机针 Applied needle	DP × 17 #18-#23
适用缝线 Thread size	最粗9股 (13#) Maximum thread 9 strands nylon
最大针距 Max stitch length	9mm
最大内外压脚交替量 Max alternating presser foot	6.5mm (旋钮调节) Manually adjusted by knob
最大抬压脚高度 Max presser foot lifting height	16mm (膝控) Preser foot lifting height by knee controller
拖布轮装置 Synchronous pulling device	√
自动供油 Auto oil system	√
操作空间 Operation space	255 × 103mm

产品概述

- 简化缝制拉链窗的操作难度，一次成型，大幅提升生产效率。
- 三同步综合送料结构，在缝制厚料或复杂结构缝料时送料平顺，上下层缝料不易产生位移。
- 配备上下主动送料的机械同步式拖布轮装置，让车缝拉链窗的过程更稳定，效果更平稳。
- 水平旋梭结构，标配3/8英寸针位组。

典型应用

适用于软体家居、办公椅等产品的拉链窗缝制工序。

Product Description

- Simplified zipper sewing can be finished in one time, so that it can significantly improve production efficiency.
- Three parts compound feed construction, while sewing heavy duty or complicated material, it is not easy to move for upper and bottom material.
- The synchronous pulling device with upper and lower feeding make the zipper sewing more stable, and the effect would be more smooth.
- It adopts horizontal large hook and standard 3/8 inch needle gauge set.

Typical Field of Application

Zipper sewing process for soft furniture and office chair.